


Transportadoras a granel

Máquinas robustas y de alta producción, de 6 a 18 m de largo.

- Para transporte de material a granel.
- Portátiles o fijas. Rolos autolimpiantes.

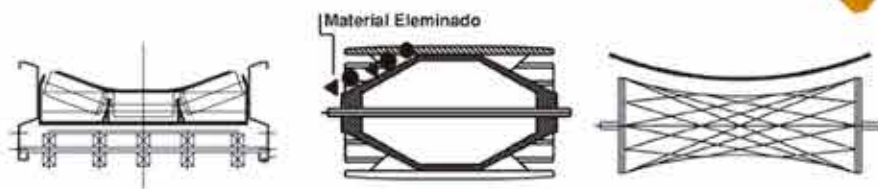

| Modelo | CGL (Livianas) | | | | CGP (Pesadas) | | | | | |
|------------------------|----------------|-------|-------|-------|---------------|-------|-------|--------|--------|--------|
| Largo máquina (mm) | 5.200 | 6.200 | 7.200 | 8.200 | 9.200 | 8.200 | 9.200 | 10.200 | 11.200 | 12.200 |
| Motor (HP) | 1 1/2 | 1 1/2 | 2 | 2 | 2 | 3 | 4 | 4 | 4 | 4 |
| Inclinación (máx. 35°) | 3.350 | 3.950 | 4.550 | 5.150 | 5.750 | 4.950 | 5.500 | 6.150 | 6.700 | 7.300 |
| Inclinación (mín. 9°) | 1.400 | 1.550 | 1.750 | 1.950 | 2.100 | 1.550 | 1.650 | 1.850 | 1.950 | 2.100 |



Chimangos a cinta

Para una elevada producción, evita la rotura de granos. De 9 a 17 m.



Estructuras tubulares

| Chimangos | Producción en Tn/Hora | | | |
|---------------------|-------------------------------------|-----|-----|-----|
| Inclinación máquina | Peso específico del material (T/m3) | | | |
| | 0,6 | 0,8 | 1 | 1,2 |
| 0° | 75 | 100 | 125 | 150 |
| 20° | 62 | 82 | 103 | 124 |
| 25° | 55 | 74 | 93 | 111 |
| 30° | 40 | 55 | 70 | 84 |